

# USS ANCHORAGE LSD 36

LAST CERTIFICATION INSPECTION : 20 Feb 95  
 CERTIFICATION GRANTED : 202356Z FEB 95

USN/USMC HELOS  
 LVL II, CL 2A-H1, H2, H3, H46, H53, H53E, H60A/B/F/H  
 LVL II, CL 4, TY 2-H1, H2, H3, H46, H53, H53E, H60A/B/F/H  
 USCG HELOS  
 LVL II, CL 2A-H60J, HH65  
 LVL II, CL 4, TY 2-H60J, HH65

USA HELOS  
 LVL II, CL 2A-H1, H6A, H58, H60A/K  
 LVL II, CL 4, TY 2-H1, H47, H60A/K  
 USAF HELOS  
 LVL II, CL 2A-H1, H53, H60G  
 LVL II, CL 4, TY 2-H1, H53, H60G



SHIPS IN CLASS  
 LSD 36 THRU LSD 40

A	B
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<b>MARKING/CLEARANCES</b>	
<input checked="" type="checkbox"/>	LANDING
<input checked="" type="checkbox"/>	VERTREP
<input checked="" type="checkbox"/>	HIFR
<input checked="" type="checkbox"/>	<b>LIGHTING</b>
<input checked="" type="checkbox"/>	LANDING
<input checked="" type="checkbox"/>	VERTREP
<input checked="" type="checkbox"/>	HIFR
<input checked="" type="checkbox"/>	<b>ACCESSORY VISUAL AIDS</b>
<input checked="" type="checkbox"/>	<b>FLT/HGR DECK</b>
<input checked="" type="checkbox"/>	DRAINAGE & SEALING
<input checked="" type="checkbox"/>	SECURING FITTINGS
<input checked="" type="checkbox"/>	STRENGTH (STRESSED FOR H1, H2, H3, H46, H53, H53E, H60B)
<input checked="" type="checkbox"/>	WIND MEASURING SYSTEM
<input checked="" type="checkbox"/>	<b>MOORING AIDS</b>
<input checked="" type="checkbox"/>	<b>COMMUNICATIONS</b>
<input checked="" type="checkbox"/>	<b>NAVIGATIONAL AIDS</b>
<input checked="" type="checkbox"/>	<b>FIRE PROTECTION</b>
<input checked="" type="checkbox"/>	<b>PERSONNEL SAFETY</b>
<input checked="" type="checkbox"/>	<b>EXPLOSIVE SAFETY</b>

A	B
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<b>SERVICING FACILITIES</b>	
<input checked="" type="checkbox"/>	FUEL STOWAGE & REFUELING
<input checked="" type="checkbox"/>	STOR TK 30,153 GAL, PUMP (GPM/PSI): 50/ 60 FILTER (GPM/PSI): 75/100
<input checked="" type="checkbox"/>	SERV TK 1,500 GAL, PUMP (GPM/PSI): 50/ 60 FILTER (GPM/PSI): 50/ 50
<input checked="" type="checkbox"/>	<b>ELECTRICAL POWER(AC/DC):</b>
<input checked="" type="checkbox"/>	NITROGEN SERVICE 28VDC, 300AMP
<input checked="" type="checkbox"/>	SERVICING FLUID STOWAGE
<input checked="" type="checkbox"/>	FRESH WATER WASHDOWN SYSTEM
<input checked="" type="checkbox"/>	HYDRAULIC SERVICING CART STOWAGE/SUPPORT
<input checked="" type="checkbox"/>	<b>MAINTENANCE FACILITIES</b>
<input checked="" type="checkbox"/>	HANGAR:
<input checked="" type="checkbox"/>	<b>WORK/OFFICE</b>
<input checked="" type="checkbox"/>	COMPONENT & SPARE PARTS STOWAGE
<input checked="" type="checkbox"/>	DEFUELING
<input checked="" type="checkbox"/>	BATTERY SERVICING
<input checked="" type="checkbox"/>	<b>RECOVERY ASSIST SECURING AND TRAVERSING (RAST) SYSTEM FACILITIES</b>


**LEGEND**

<input checked="" type="checkbox"/>	Required
<input type="checkbox"/>	Not Required
<input checked="" type="checkbox"/>	Meets Requirements
<input checked="" type="checkbox"/>	Does Not Meet Reqts
<input type="checkbox"/>	Not Provided

**COLUMN A**  
(Cert Requirement)

**COLUMN B**  
(Cert Status)

AVERAGE CLASS HELO DECK HEIGHT ABOVE WATERLINE: 35' 3" (SUPER DK AFT)

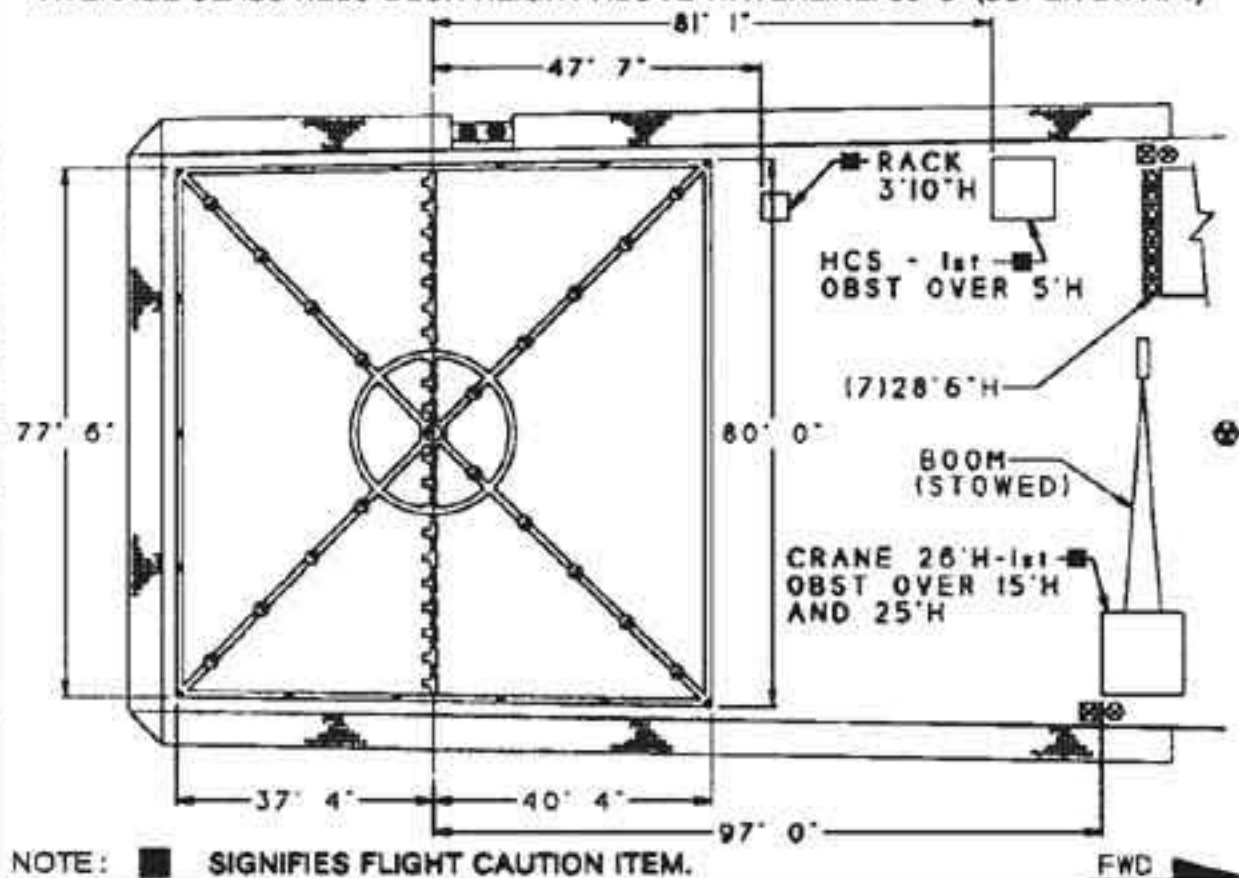

USS ANCHORAGE